



PLAN

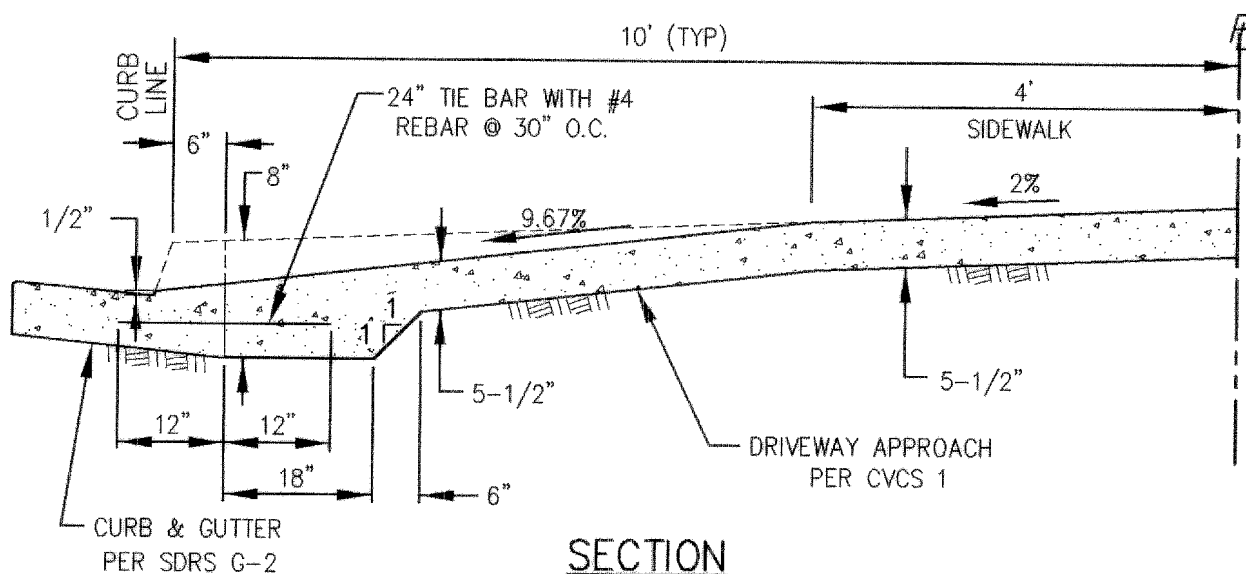

SECTION

NOTE:

TIE BARS SHALL BE CAST IN CONCRETE AND HELD IN POSITION BY MEANS APPROVED BY THE INSPECTOR OR TIE BARS MAY BE INSTALLED BY DRILLING AND BONDING WITH AN APPROVED EPOXY ADHESIVE. (EPOXY ADHESIVE SHALL HAVE A MINIMUM BOND STRENGTH IN 1 DAY EQUAL TO 2000 PSI. DRILL BIT SHALL EQUAL BAR DIAMETER PLUS 1/8".)

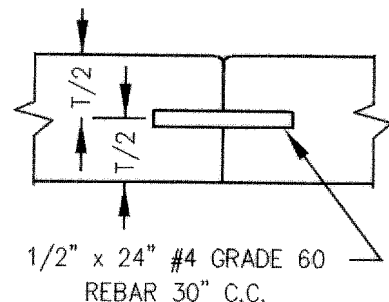

CONCRETE JOINT DETAIL

FOR ADDITIONAL NOTES AND SPECIFICATIONS, SEE CITY OF CHULA VISTA CONSTRUCTION STANDARD DWG. NO. CVCS 1A.

Revised:	Original approval date: 3-16-99	CITY OF CHULA VISTA PUBLIC WORKS DEPARTMENT	
CVM 9-5-01	Redrawn By: CVM Date: 3-16-99		
	<i>Difford Skansen</i>	DRIVEWAY APPROACH FOR STREETS WITH NON-CONTIGUOUS SIDEWALK	
	CITY ENGINEER Date: 11-7-02		
			CVCS 1B