




CHULA VISTA FIRE DEPARTMENT


FIRE PREVENTION DIVISION

Structure Setback Detail

TOP VIEW

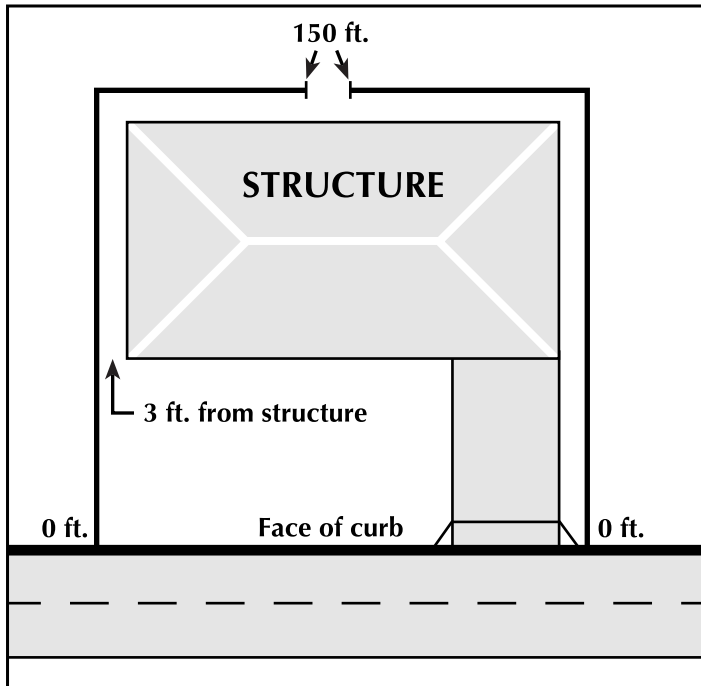

EXAMPLE 1

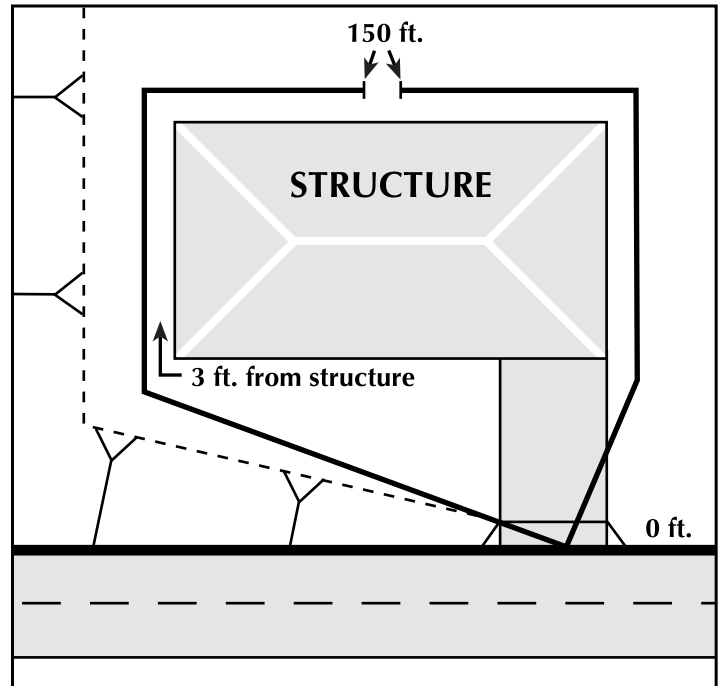

EXAMPLE 2

Notes:

1. Measurement starts at the face of the curb.
2. The measurement shall stay beyond 3 feet of the structure.
3. The measurement shall end at 150 feet.
4. If any part of the structure is left uncovered (remote portion) then the structure shall be protected throughout by an approved fire sprinkler system.
5. In some circumstances (elevation changes) the starting point of both measurements shall be taken from the center line of the driveway.
6. Please show measurements for all structures within the submittal scope.

